


VSAM RLS *Best Practices*

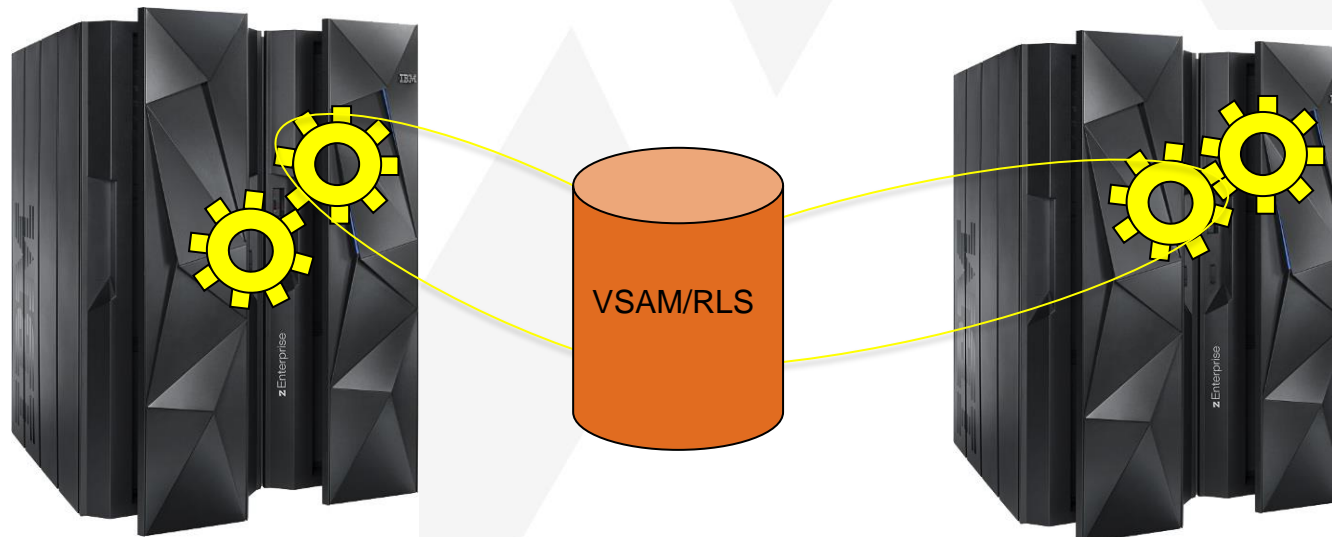

Terri Menendez
STSM
zSystems, IBM Corp
terriam@us.ibm.com

Roity Prieto
Senior Programmer
zSystems IBM Corp
rprieto@us.ibm.com
August 2022

Agenda

- RLS Introduction
- RLS SYSPLEX Example
- RLS Buffering
- RLS Caching
- RLS Physical I/O
- RLS Locking
- RLS Data Sets
- Monitoring
- SMF Reporting
- RLS SYSPLEX Example – Multiple Exploiters
- RLS Performance Enhancements
- Customer Benchmarks / Performance Data



RLS Introduction


VSAM RLS Introduction

- ❑ VSAM RLS provides full data sharing to your existing VSAM files (KSDS, ESDS,(V)RRDS), in a parallel SYSPLEX.
- ❑ Allows for high availability (HA) by allowing data sets to be shared cross LPARs/CECs via structures in the Coupling Facility (CF).
- ❑ Allows for high scalability by allowing many address spaces and LPARs to share the same files.
- ❑ Provides record level serialization, 64 bit buffering, and global caching for better performance.



RLS SYSPLEX Example

RLS SYSPLX Example

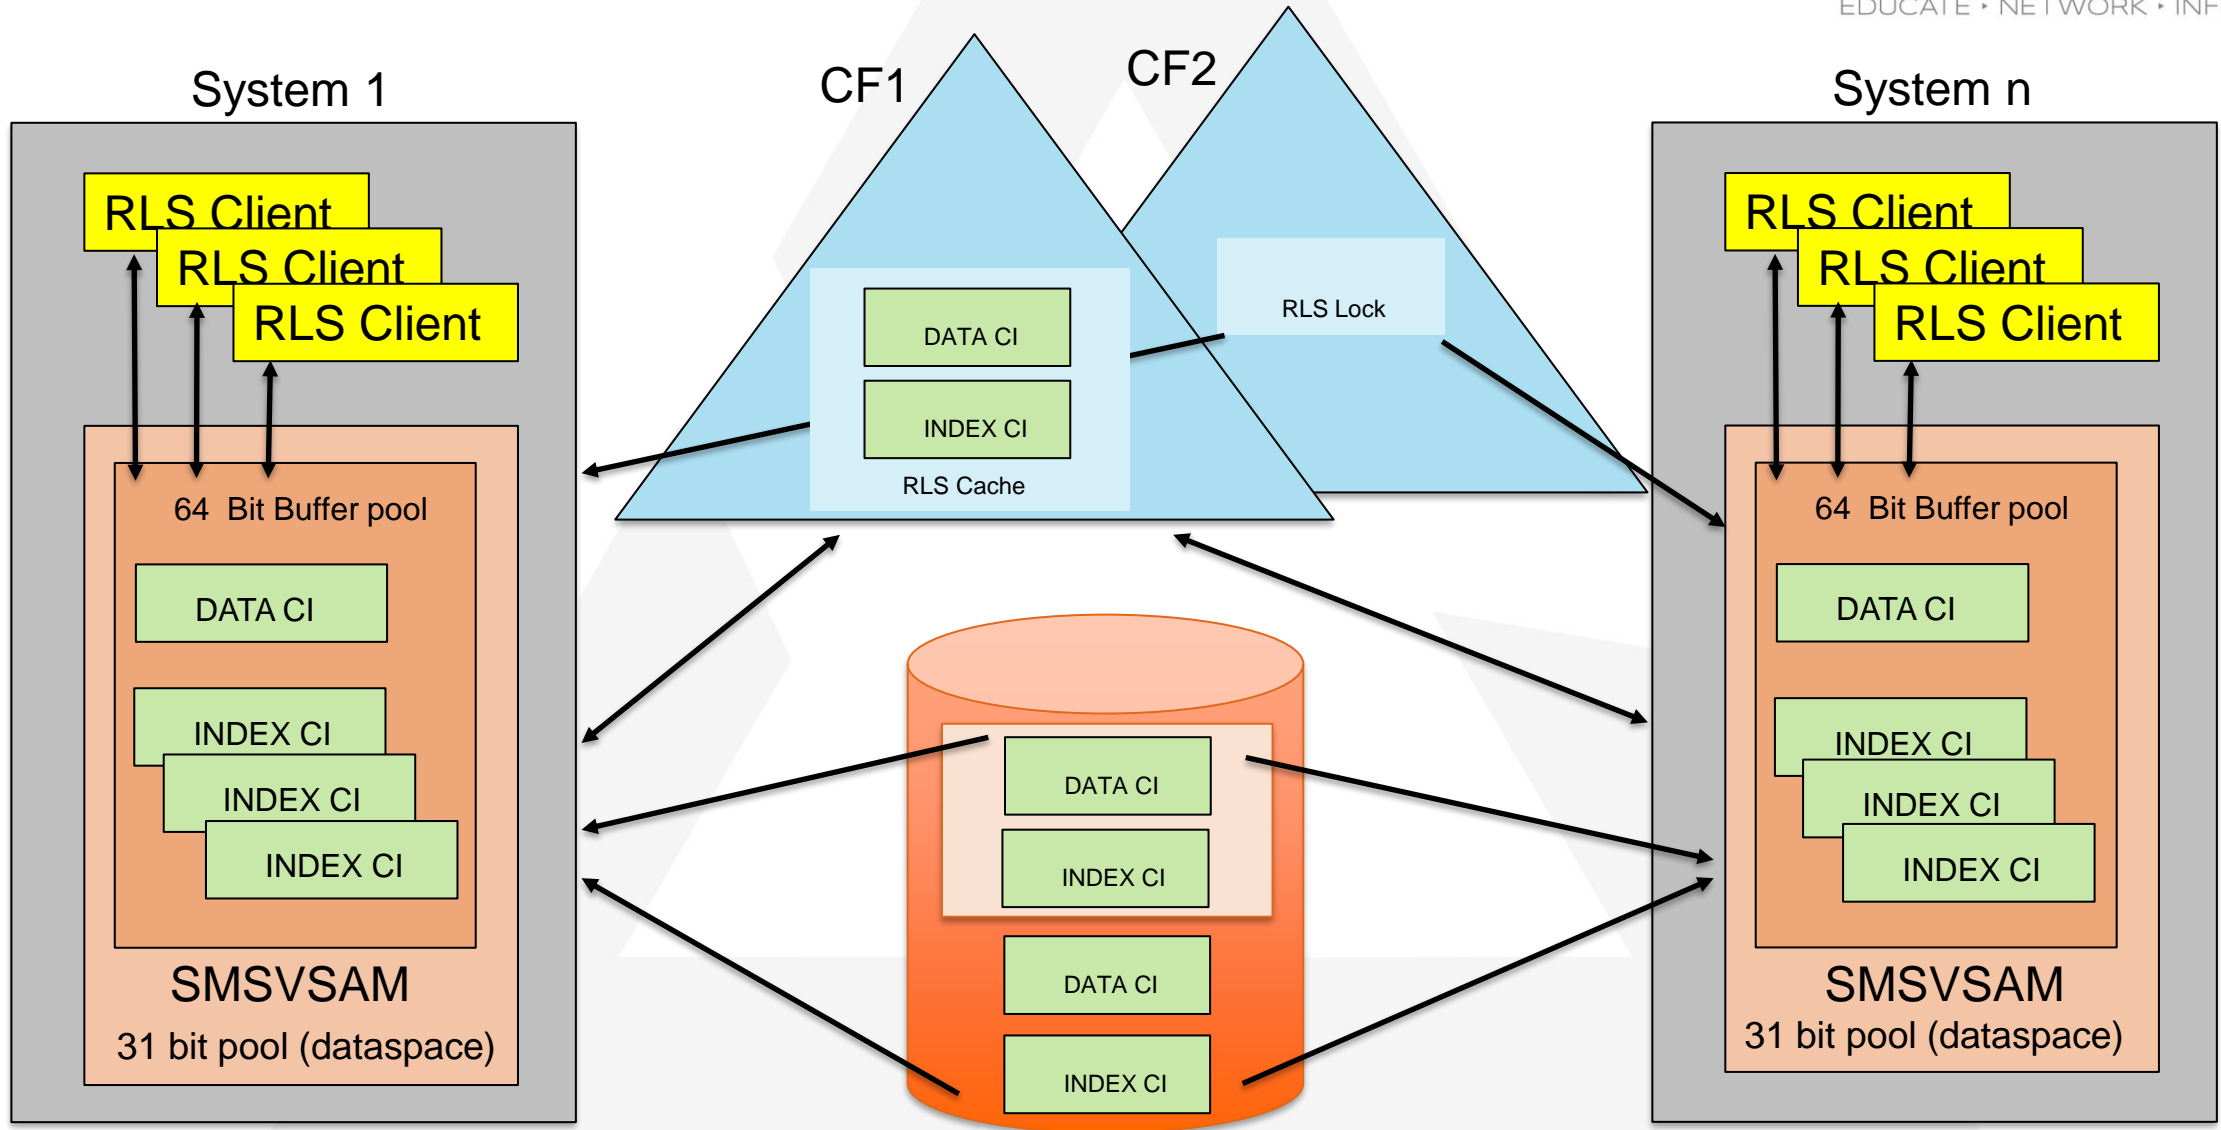




RLS Buffering

RLS Buffer Pools

System n

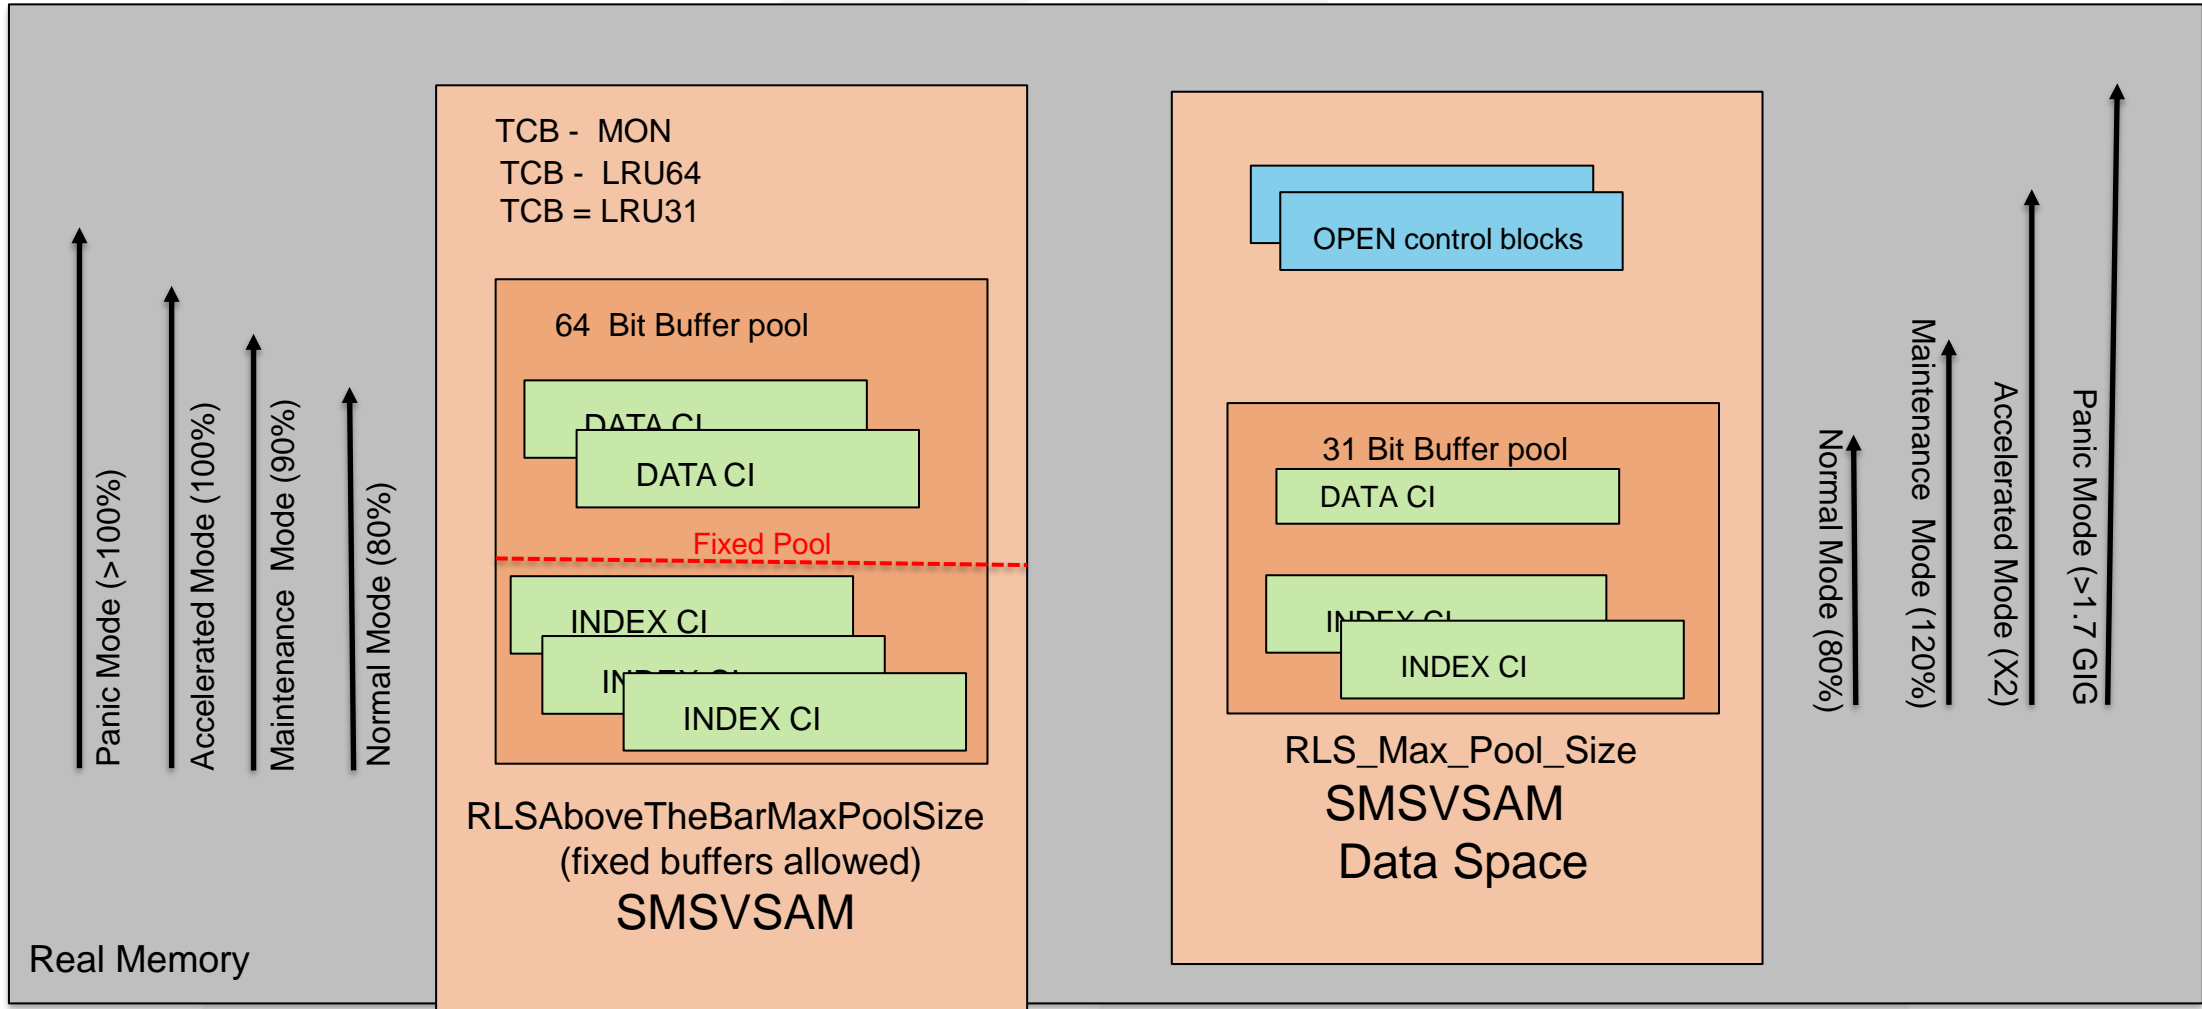

RLS Buffering - LRU

RLS 64 bit LRU - Modes

The LRU for the 64 bit buffer pool operates in four modes:

- **Normal Mode** - Total 64 bit pool size is less than 80% of RLSAboveTheBarMaxPoolSize.
- **Maintenance Mode** - Total 64 bit pool size is greater than 80% and less than 90% of RLSAboveTheBarMaxPoolSize.
- **Accelerated Mode** - Total 64 bit pool size is greater than 90% and less than 100% of RLSAboveTheBarMaxPoolSize.
- **Panic Mode** - Total 64 bit pool size is greater than 100% of RLSAboveTheBarMaxPoolSize

RLS Buffering - LRU

RLS 31 bit LRU - Modes

The LRU for the 31 bit buffer pool operates in four modes:

- **Normal Mode** - Total 31 bit pool size is less than 80% of RLS_Max_Pool_Size.
- **Maintenance Mode** - Total 31 bit pool size is greater than 80% and less than 120% of RLS_Max_Pool_Size.
- **Accelerated Mode** - Total 31 bit pool size is greater than 120% and less than 2* of RLS_Max_Pool_Size.
- **Panic Mode** - Total 31 bit pool size is greater than 2* RLS_Max_Pool_Size or >1.7 GIG.

RLS Buffering – LRU (cont.)

The LRU will release buffers as follows:

- **Normal Mode** - Buffers stay indefinitely in normal mode.
- **Maintenance Mode** - Buffers 60 minutes or older will be released.
- **Accelerated Mode** - Buffers 30 minutes or older will be released. Requests for new buffers will first be stolen. If there are no buffers to steal a new get block will be done.
- **Panic Mode** - Buffers 5 minutes or older will be released. Requests for new buffers will first be stolen. If there are no buffers to steal, the request will sleep until LRU runs.

RLS Buffering Parameters

SYS1.PARMLIB(IGDSMSxx):

- **RLS_MAX_POOL_SIZE(100/nnnn)** Where nnnn = (10 to 9999), anything over 1500 is treated as a maximum of 1728M.
 - **RLSAboveTheBarMaxPoolSize(sysname/ALL,0/nnnn)** Where nnnn is either 0 (default), or 500M to 2,000,000M. Minimum value 500M.
 - **RLSFixedPoolSize(sysname/ALL,0/nnnn)** Where nnnn is either 0 to 80% of real storage
-
- ❑ Only one RLS_Max_Pool_Size for all lpars
 - ❑ RLSAboveTheBarMaxPoolSize and RLSFixedPoolSize can have individual sizes for each LPAR.
 - ❑ Best to not use the ALL parameter, it will override individual settings.
 - ❑ **Caution:** Buffers are fixed on a first come first serve basis. For example, if the first data set opened and accessed has a 4K CISIZE, then the fixed buffers will be 4K in size for the life of this SMSVSAM instance.
 - ❑ Fixed buffers can provide a significant performance improvement since the RSM pin/unpin calls are avoided.

RLS Buffering Parameters (Cont.)

- ❑ Pool size values are a goal for which the RLS Least Recently Used (LRU) manager tries to maintain. If more buffers are required at any given time, the pool may temporarily exceed the values set.
- ❑ Total amount of buffer pools should not exceed amount of real storage. A paged out buffer is freed by the LRU.
- ❑ Data sets must set RLSAboveTheBar(YES) in the DATACLAS to use the above the bar pool. NO is the default.

Sizing the Pools:

- ❑ For CICS or other LSR users, start with a pool size = sum of LSR pools per lpar.
- ❑ For catalog, start with VLF MAXVIRT * 4096 per lpar or based on total catalog size.
- ❑ For exploiters with no existing buffering (ie HSM), consider starting with buffering the index CIs, and 20% of the data CIs (refer to High Used RBAs in the catalog).
- ❑ Buffering success is measured by BMF hit rate, average elapse and CPU time, and LRU mode.
- ❑ Internal IBM testing with 128 GIG above the bar pool.




RLS CF Caching

RLS Cache Structure

D XCF,STR,STRNAME=RLS_CACHE (example)

STRNAME: RLS_CACHE
 STATUS: ALLOCATED
 EVENT MANAGEMENT: POLICY-BASED
 TYPE: CACHE
 POLICY INFORMATION:
 POLICY SIZE : 20000000 K
POLICY INITSIZE: 15000000K
 POLICY MINSIZE : 0 K
 FULLTHRESHOLD : 80
ALLOWAUTOALT : NO
 REBUILD PERCENT: 80
 DUPLEX : DISABLED
 ALLOWREALLOCATE: YES
 PREFERENCE LIST: FACIL01 FACIL02
 ENFORCEORDER : NO
 EXCLUSION LIST IS EMPTY

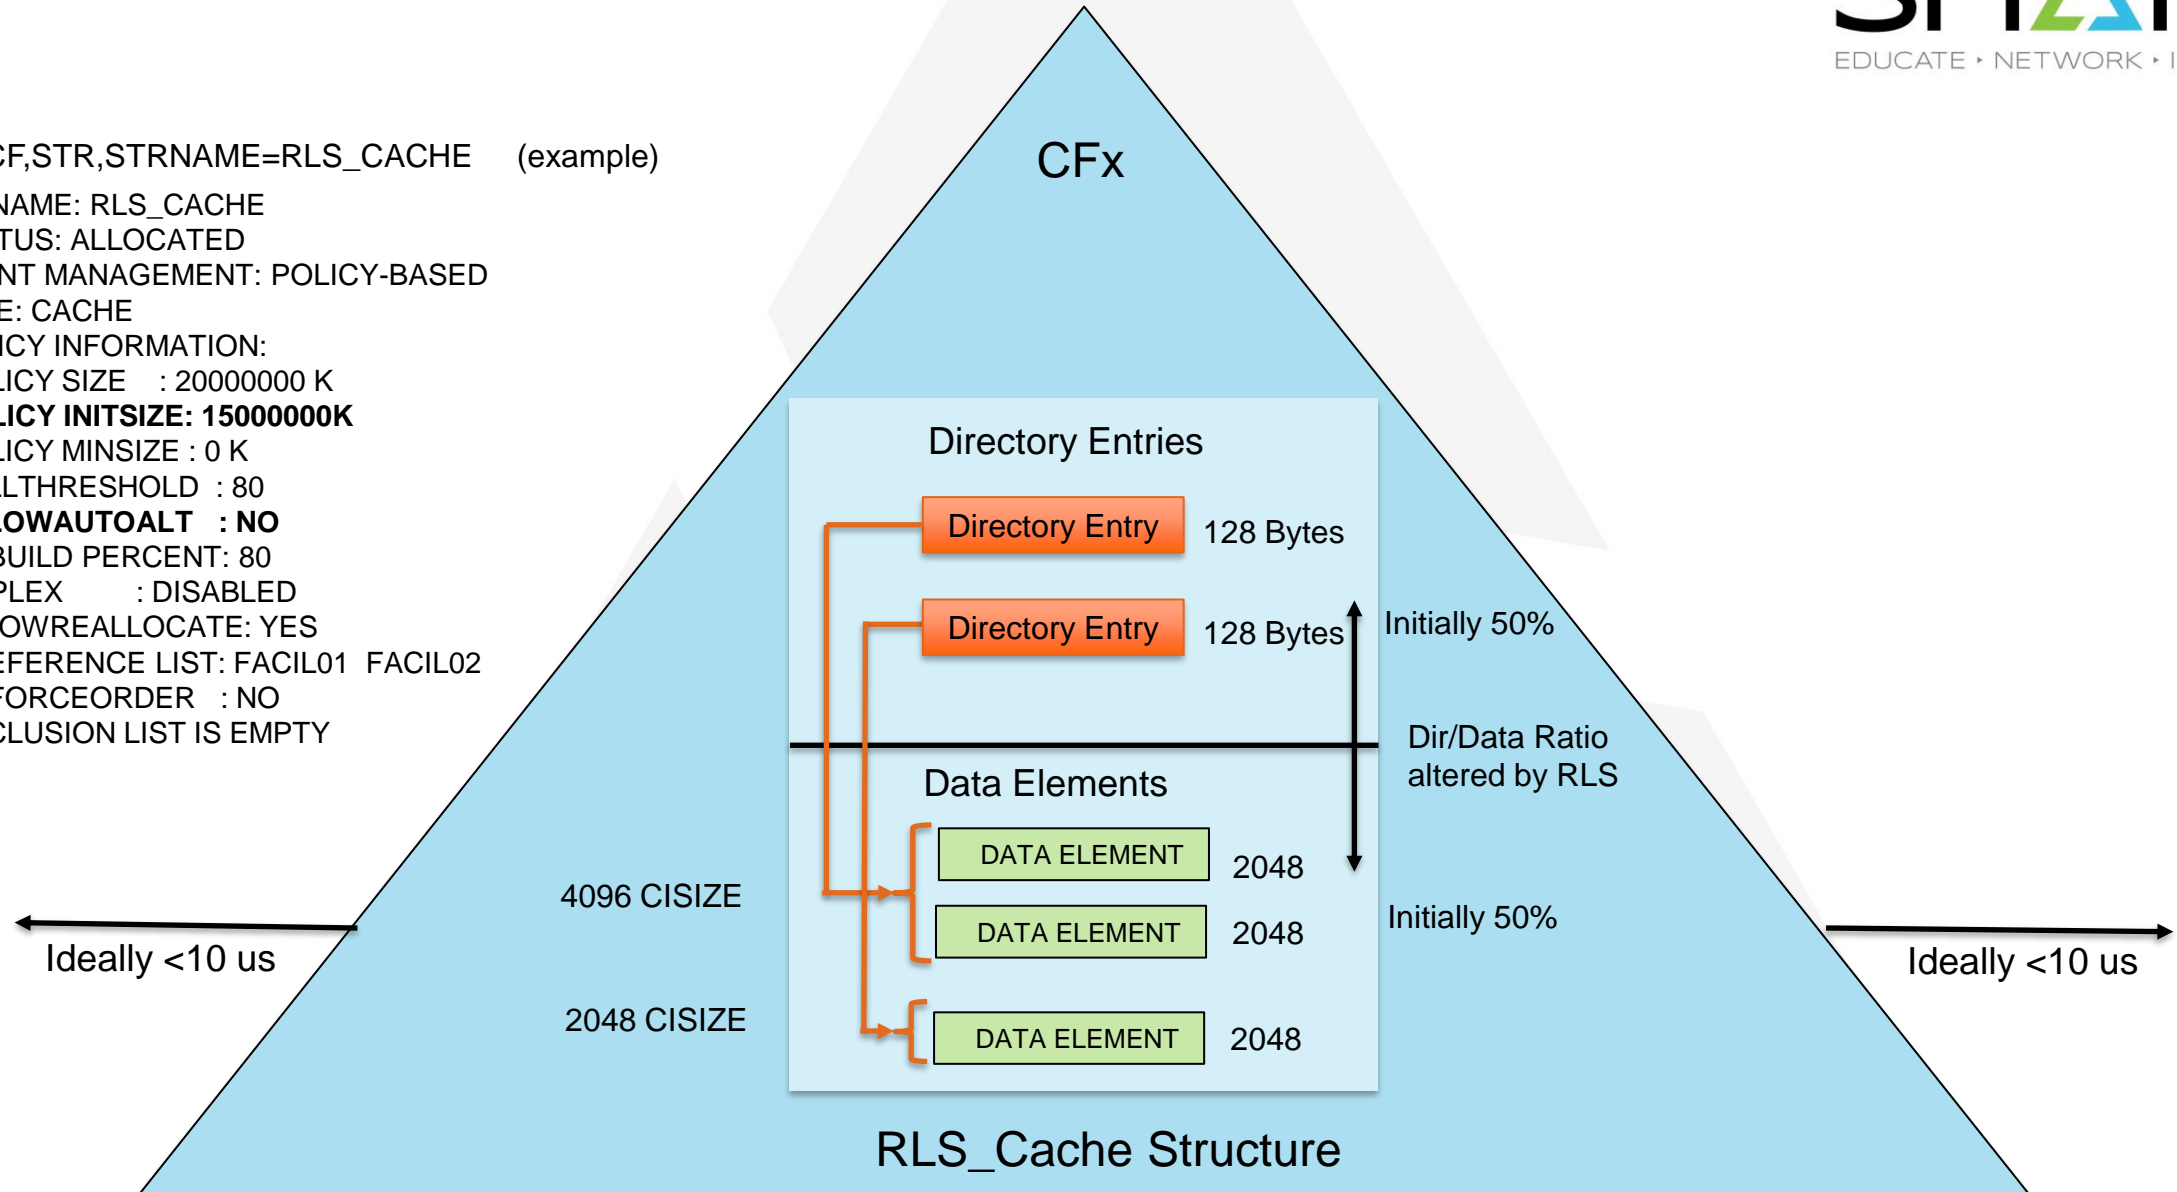

RLS Caching

SYS1.PARMLIB(IGDSMSxx):

- **RLS_MaxCFFeatureLevel(Z/A)** Where feature level A allows CISIZE >4K to be cached.
- RLS uses a store-thru-cache design, serialized by the CF CASTOUT lock.
- Each SMSVSAM registers interest with directory entries when reading a CI, then invalidates the entries on writing the (XI).
- Entries are reclaimed when a cache is “full”, and will invalidate the associated buffers.
- Data elements can be scaled back via DATACLAS
RLSCFCACHE(ALL/UPDATESONLY/NONE/DIR ONLY)
- RLS caches cannot be duplexed.
- RLS caches will automatically rebuild for CF issues. A new structure will be allocated empty.

CISIZE	Dir Entry	Data Elements
2K	1	1
4K	1	2
6K	1	3
8K	1	4
10K	1	5
12K	1	6
14K	1	7
16K	1	8
18K	1	9
20K	1	10
22K	1	11
24K	1	12
26K	1	13
28K	1	14
30K	1	15
32K	1	16

RLS Cache Sizing


- **The sum of all the RLS cache structures should equal the sum of all the RLS buffer pools across the sysplex.**
- RLS BMF False Invalids and CF Reclaims for XI indicate the cache is too small relative to the size of the buffer pools.
- Splitting data sets with same performance requirements across multiple cache structures may lead to cache balancing problems.
- Different applications should have their own cache structures.



RLS Physical I/O Considerations

RLS Physical I/O

- RLS always writes the Records (CIs) to disk.
- The CF castout lock serializes the write to the CF cache and to disk from each system. Readers wait for the castout lock.
- RLS supports compression, striping, and data set encryption.
- RLS supports the new zHyperlink technology for reads only.
- CI contention is measure by “REDOs” and CASTOUT lock contention/retries.

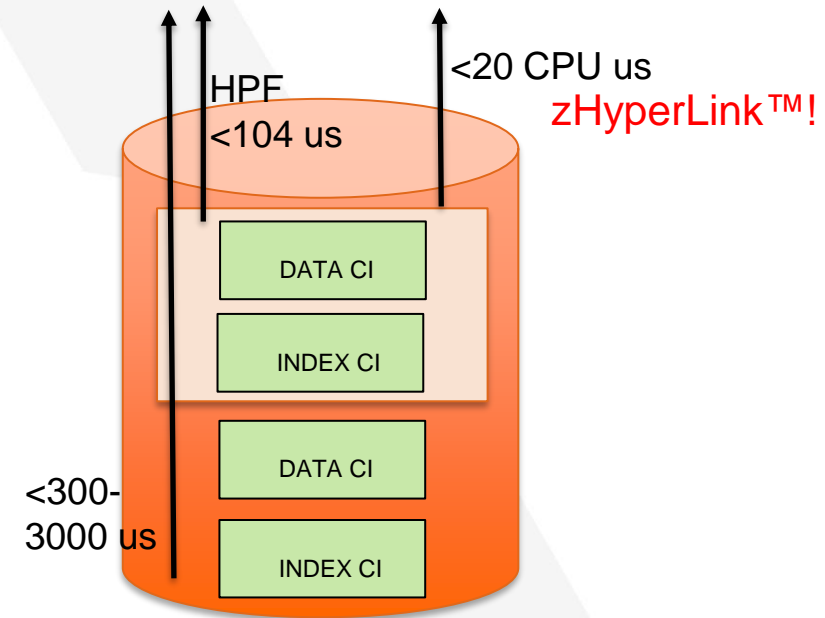

Example response times




RLS Locking Considerations

RLS Lock Structure

```

D XCF,STR,STRNAME=IGWLOCK00 (example)
STRNAME: IGWLOCK00
STATUS: REASON SPECIFIED WITH REBUILD START:
  POLICY-INITIATED
  DUPLEXING REBUILD
  METHOD: SYSTEM-MANAGED
  AUTO VERSION: D4C07857 A1142913
  PHASE: DUPLEX ESTABLISHED
EVENT MANAGEMENT: POLICY-BASED
TYPE: LOCK
POLICY INFORMATION:
POLICY SIZE : 1000000 K
POLICY INITSIZE: N/A
POLICY MINSIZE : 0 K
FULLTHRESHOLD : 50
ALLOWAUTOALT : YES
REBUILD PERCENT: nn
DUPLEX      : DISABLED
ALLOWREALLOCATE: YES
PREFERENCE LIST: CF1 CF2
EXCLUSION LIST IS EMPTY
    
```

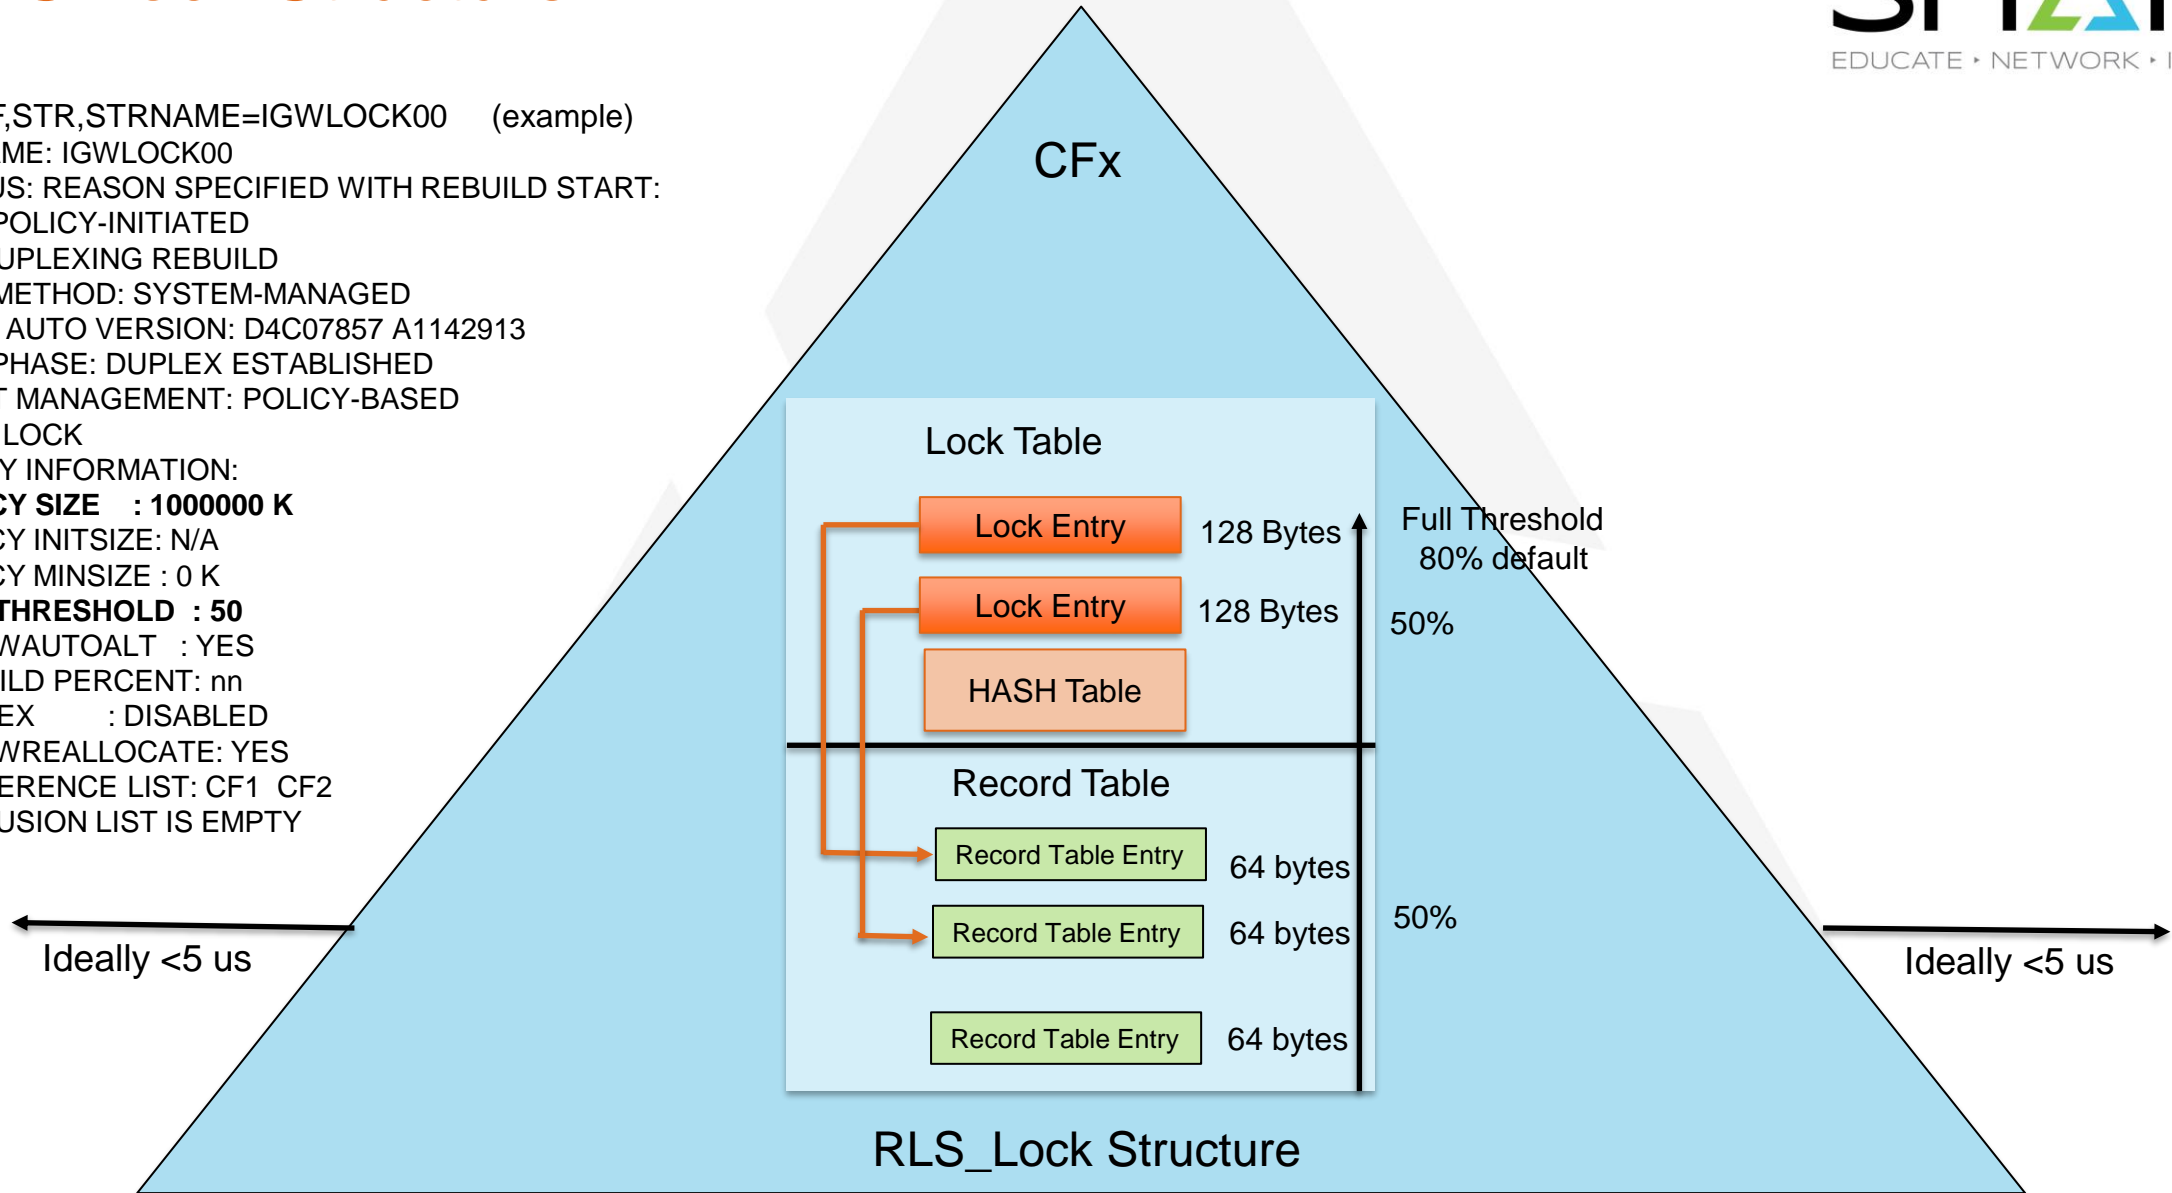

RLS_Lock Structure

RLS Lock Structure Sizing

- ❑ $\text{Lock_Structure_Size} = 10\text{M} * \text{number_of_Systems_in_sysplex} * \text{Lock_entry_Size}$
- ❑ Lock_entry_Size (depends on the CFRM MAXSYSTEM value):
 - MAXSYSTEM ≤ 7 Lock_entry_size = 2
 - MAXSYSTEM ≥ 8 & < 24 Lock_entry_size = 4
 - MAXSYSTEM ≥ 24 & ≤ 32 Lock_entry_size = 8
- ❑ Example: MAXSYSTEM = 23 and 8 systems in sysplex
 - $\text{IGWLOCK00} = 10\text{M} * 8 * 4 = 320\text{M}$

RLS Locking

- ❑ RLS has many types of locks:
 - Record level
 - Index level
 - Data set level
 - LPAR level
 - Sysplex level

- ❑ Two types of lock management:
 - Global – lock requests from different lpars.
 - Local - lock requests from same system.

- ❑ Two types of lock contention:
 - True - two or more requests want the same lock. Usually, can be managed by the user.
 - False - two or more requests want different locks but hash to the same lock entry. Indication of a too small lock structure.

- ❑ Assigned data sets to different lock structures for different applications.

- ❑ All locks have SMF42 fields providing statistics on contention.

RLS Lock Rate Display

❑ D SMS,CFLS (Coupling Facility Lock Structure)

J80 12152 15:30:56.26 D SMS,CFLS
IGW320I 15:30:56 Display SMS,CFLS(IGWLOCK00)
PRIMARY STRUCTURE:IGWLOCK00 VERSION:C99DC09480021972 SIZE:200704K
RECORD TABLE ENTRIES:434612 USED:984
SECONDARY STRUCTURE:IGWLOCK00 VERSION:C9A3EFBCF6FC3610
SIZE:200704K
RECORD TABLE ENTRIES:434612 USED:984
LOCK STRUCTURE MODE: DUPLEXED STATUS: ENABLE

System	Interval	LockRate	ContRate	FContRate	WaitQLen
J80	1 Minute	1239.1	0.065	0.042	0.33
J80	1 Hour	373.9	0.099	0.038	0.04
J80	8 Hour	-----	-----	-----	-----
J80	1 Day	-----	-----	-----	-----
(13)	1 Minute	344.9	0.029	0.014	0.10
(13)	1 Hour	108.4	0.041	0.015	0.03

Ideal contention levels are less 0.5%



RLS Data Set Considerations

Data Set Considerations

□ All VSAM Record Type Data sets:

- Maximum size with DATACLAS Extended Format (EF) and Extended Addressability (EA). Based on CI size, for example:
 - A CI size of 4 KB yields a maximum data set size of 16 TB
 - A CI size of 32 KB yields a maximum data set size of 128 TB
- Maximum number of volumes per data set: 59
- Maximum number of extents per volume 123.
- Maximum number of extents with DATACLAS option Space Constraint Relief . . . Y :
 - $59 * 123 = 7257$
- Reduce space option in DATACLAS Reduce Space Up To percentage to for extends
- CISIZES which span tracks: 14K, 20K, 22K, 28K, 30K, AND 32K
- May want to key range very large data sets to avoid performance and recovery issues.

Data Set Considerations

□ KSDSs

- **Most scalable type of VSAM** data set when using random inserts.
- **Avoid adding to the end of a KSDS (ie ascending keys) when possible.**
- Avoid a high volume of inserts into an empty data set. Add/delete dummy keys to prime free space.
- Consider larger CISIZES for data sets with high inserts / erases to avoid CI/CA splits/reclaims.
- Consider smaller CISIZES for high updates (no record length change) to avoid CI REDO's and CASTOUT lock contention.
- Consider compressing records (DATACLAS COMPRESSION=Y) especially for large RECORDSIZES. May also reduce CI splits/reclaims by allowing for more records per CI.
- Use CA Reclaim to improve performance, reduce space, and avoid reorganizations for fragmentation (applies to data sets with ERASEs).
- Reduce the need to extend data sets by providing adequate primary space.
- CI split/reclaims can occur concurrently in different CAs. Serialized by Component_1 Class 4 (Index) locks.
- CA split/reclaim are serial for the data set. Controlled by the Component_1 Class1 (DIWA) lock.
- Reduce index levels when possible, through the use of CA Reclaim,

Data Set Considerations

□ ESDSs

- Not a scalable data set for high inserts, since inserts must be at the end of the data set.
- Consider sub-dividing poor performing ESDSs.
- Inserts are serial and are controlled by the Component_2 lock.

□ Alternate Indexes

- Prior to z/OS 2.3 inserts, erases, and updates with record length changes were serial and controlled by the Component_2 (Upgrade) lock.
- With z/OS 2.3 lower level serialization (record locks and REDOs) are used to allow concurrent writes.



RLS Monitoring

RLS Monitors

- ❑ RMF Monitor III
- ❑ IBM Tivoli Omegamon XE for Storage (see IBM website for more info)
- ❑ IBM Tivoli Omegamon XE for CICS (see IBM website for more info)

RMF RLS Displays

RMF III Sysplex Report Selection Menu

Selection ==>

Enter selection number or command for desired report.

Sysplex Reports

- | | | | |
|----|---------------|------------------------------------|-------|
| 1 | SYSSUM | Sysplex performance summary | (SUM) |
| 2 | SYSRTD | Response time distribution | (RTD) |
| 3 | SYSWKM | Work Manager delays | (WKM) |
| 4 | SYSENG | Sysplex-wide Enqueue delays | (ES) |
| . | | | |
| 7 | CFACT | Coupling Facility activity | (CA) |
| . | | | |
| 10 | RLSSC | VSAM RLS activity by storage class | (RLS) |
| 11 | RLSDS | VSAM RLS activity by data set | (RLD) |
| 12 | RLSLRU | VSAM LRU overview | (RLL) |

RMF CF Structure Detail Display

RMF CF Structure Detail:

COUPLING FACILITY USAGE SUMMARY													

STRUCTURE SUMMARY													

STRUCTURE TYPE	NAME	STATUS	CHG	ALLOC SIZE	% OF CF STOR	# REQ	% OF ALL REQ	% OF CF UTIL	AVG REQ/ SEC	LST/DIR ENTRIES TOT/CUR	DATA ELEMENTS TOT/CUR	LOCK ENTRIES	DIR REC/ DIR REC TOT/CUR XI'S
CACHE	RLSCACH1	ACTIVE		7G	19.8	299236	19.8	n/a	332.48	2049K	3506K	n/a	40K
										2049K	3171K		2K
CACHE	RLSCACH2	ACTIVE		7G	19.8	145452	8.2	n/a	162.32	2049K	3506K	n/a	23K
										2049K	3171K		0K

Note: RMF CFDETAIL must be active: F RMF,MODIFY III,CFDETAIL

RLS RMF Displays

F RMF MONITOR III SYSPLEX RLS Activity by Storage Class (sysplex wide)

ERB3BUF RMF V1R8 VSAM RLS Activity - SYSPLEX Line 1 of 14
 Command ==> Scroll ==> CSR

LRU Status : Good
 Contention % : 0.0
 False Cont % : 0.0

StorClas	Access	Resp Time	-----Read-----				----- BMF -----		Write rate
			Rate	BMF%	CF%	DASD%	Valid%	False Inv%	
STORCLAS1									
Below 2G	DIR	0.000	0.00	0.0	0.0	0.00	0.0	0.00	0.00
	SEQ	0.000	0.00	0.0	0.0	0.00	0.0	0.00	0.00
Above 2G	DIR	0.000	84299	100.0	0.0	0.00	100	0.00	0.00
	SEQ	0.000	0.00	0.0	0.0	0.00	0.0	0.00	0.00

RLS RMF Displays (cont.)

F RMF MONITOR III SYSPLEX RLS Activity by Data Set (sysplex wide)

ERB3BUF RMF V1R8 VSAM RLS Activity - SYSPLEX Line 1 of 14
 Command ==> Scroll ==> CSR

LRU Status : Good
 Contention % : 0.0
 False Cont % : 0.0

Sphere/DS	Access	Resp	-----Read-----				----- BMF -----		Write
		Time	Rate	BMF%	CF%	DASD%	Valid%	False Inv%	rate
USERCAT1									
Below 2G	DIR	0.000	2438	100	0.0	0.0	100	0.00	0.00
	SEQ	0.000	0.00	0.0	0.0	0.0	0.0	0.00	0.00
Above 2G	DIR	0.000	0.00	00.0	0.0	00.0	0.0	0.00	0.00
	SEQ	0.000	0.00	0.0	0.0	0.0	0.0	0.00	0.00
USERCAT1.INDEX									
Below 2G	DIR	0.00	7314	100	0.0	0.0	100	0.00	0.00
	SEQ	0.000	0.00	0.0	0.0	0.0	0.0	0.00	0.00
Above 2G	DIR	0.000	0.00	00.0	0.0	00.0	0.0	0.00	0.00
	SEQ	0.000	0.00	0.0	0.0	0.0	0.0	0.00	0.00

RLS RMF Displays (cont.)

RMF MONITOR III **SYSPLEX VSAM LRU Overview**

Samples: 59 Systems: 1 Date: 07/27/18 Time: 12.38.50 Range: 10

MVS System	Avg CPU Time	- Buffer Goal	Size High	- Accel %	Reclaim %	----- Read BMF%	----- CF%	DASD%
------------	--------------	---------------	-----------	-----------	-----------	-----------------	-----------	-------

SYS1

Below 2GB	0.1147	850M	952M	100	0.0	85.0	10.0	5.0
Above 2GB	0.112	20G	17G	0.0	0.0	100	0.0	0.0

SYS2

Below 2GB	0.1147	850M	610M	43.0	0.0	89.0	9.0	2.0
Above 2GB	0.112	20G	16G	0.0	0.0	100	0.0	0.0



RLS SMF Reporting

- ❑ SMF 42 Subtypes 15, 16, 17, 18, 19
 - **Subtype 15** - RLS statistics by Storage Class
 - **Subtype 16** - RLS statistics by Data set
 - Must use V SMS,MONDS(spherename),ON to collect subtype 16 statistics.
 - Must turn on data set collection when using RMF III:
 - F III,VSAMRLS(ADD(DSNAME.**))
 - **Subtype 17** - RLS locking statistics
 - **Subtype 18** - RLS caching statistics
 - **Subtype 19** - BMF statistics
- ❑ **Note:** Only one system in the sysplex collects the SMF 42 records. The system collecting the records is displayed in the D SMS,SMSVSAM operator command.

Storage Class Response Time Summary above the bar (1 of 4)

	<u>Data Point</u>	<u>Description</u>	<u>R1</u>	<u>R2</u>	<u>R3</u>
1	SMF2AFCB	Total number of direct access requests	1,222,095K	1,168,991K	6,973,985K
2	SMF2AFEB	Total number of sequential access requests	103,283K	105,129K	125,812K
3	SMF2AFCE	Total number of Write requests (direct access)	169,545K	179,824K	558,406K
4	SMF2AFEE	Total number of Write requests (sequential access)	155,880	158,052	170,564
5	SMF2AFCC	Total number of direct access Read requests - no read integrity	876,748K	843,359K	5,967,538K
6	SMF2AFCD	Total number of direct access Read Requests - Consistent reads	985,412	1,058,640	806,420
7	SMF2AFEC	Total number of sequential access read requests - NRI protocol (No Read Integrity)	47,798K	32,270K	60,857K
8	SMF2AFED	Total number of sequential access read requests - Consistent read protocol	73,883K	79,984K	65,638K
9	SMF2AFEF	Number of sequential access BMF requests	103,310K	105,150K	126,167K
10	SMF2AFCX	Average response time for all of the direct access requests in this interval (total time/number of requests)	0.00	2.00	0.00

Storage Class Response Time Summary above the bar (2 of 4)

	<u>Data Point</u>	<u>Description</u>	<u>R1</u>	<u>R2</u>	<u>R3</u>
11	SMF2AFEX	Average response time for all of the sequential access requests in this interval	22.00	21.00	133.00
12	SMF2AFCF	Number of direct access BMF requests.	2,032,763K	1,961,786K	12,448,776K
13	SMF2AFCK	Number of direct access BMF false invalids	1,530,828	1,411,136	2,274,008
14	SMF2AFEK	Number of sequential access BMF false invalids	2,528,140	1,836,668	632,412
15	SMF2AFOA	Number of record lock requests (obtain/alter/promote)	311,500K	325,252K	451,567K
16	SMF2AFOB	Number of record lock requests that cause true contention	24,168	21,768	70,596
17	SMF2AFOC	Number of record lock requests that cause false contention	0	0	0
18	SMF2AFOE	Number of component_1 type lock requests	3,551,640	4,167,400	12,420,732
19	SMF2AFOH	Number of component_1 class_1 (DIWA) locks (obtain/alter/promote)	882,432	966,804	2,725,548
20	SMF2AFOI	Number of component_1 class_1 (DIWA) locks that cause true contention	3,832	4,996	23,964

Storage Class Response Time Summary above the bar (3 of 4)

	<u>Data Point</u>	<u>Description</u>	<u>R1</u>	<u>R2</u>	<u>R3</u>
21	SMF2AFOT	Number of component_2 lock requests (obtain/alter/promote)	288	304	192
22	SMF2AFOU	Number of component_2 locks that cause true contention	0	0	0
23	SMF2AFPHA	Number of component_1 class 4 (Index Record) locks (obtain/alter/promote)	2,844,884	3,328,424	9,695,184
24	SMF2AFPIA	Number of component_1 class 4 (Index Record) locks that cause true contention	244,100	316,316	885,108
25	SMF2AFPJA	Number of component_1 class 4 (Index Record) locks that cause false contention	748	6,372	52
26	SMF2AFPKA	Number of component_1 class 4 (Index Record) release lock requests	2,412,848	2,201,064	8,944,280
27	SMF2AFEL	Number of requests processed by the sysplex cache manager	14,283,116	14,738,768	39,528,412
28	SMF2AFEM	Number of CF read requests	14,282,116	14,737,512	39,527,604
29	SMF2AFEN	Number of CF write requests	91,056	88,488	112,892
30	SMF2AFEO	Number of CF read hits	10,939,140	11,677,832	26,806,196


Sysplex Totals Local Buffer Manager LRU Statistics Summary above the bar (1 of 3)

	<u>Data Point</u>	<u>Description</u>	<u>R1</u>	<u>R2</u>	<u>R3</u>
1	SMF2AJN7	Total number of write requests (sysplex totals)	85,421K	92,298K	277,871K
2	SMF2AJNL	Total number of times that BMF was called in this interval (across sysplex)	2,207,415K	2,155,090K	12,343,351K
3	SMF2AJNN	Total number of Buffer Manager hits during this interval	2,162,418K	2,106,144K	12,044,872K
4	SMF2AJNO	Buffer Manager hits current percentage during this interval	93.00	92.00	97.00
5	SMF2AJNT	Total Sysplex Cache manager number of hits during this interval	39,772K	61,380K	244,989K
6	SMF2AJNU	Sysplex Cache manager number of hits current percentage during this interval	2.00	3.00	2.00
7	SMF2AJTO	High percentage of RE-DOs during this interval (across the sysplex)	96.00	115.00	94.00
8	SMF2AJNZ	Total DASD number of hits during this interval	18,007K	18,011K	94,244K
9	SMF2AJOA	DASD hits current percentage during this interval	5.00	6.00	6.00
10	SMF2AJTB	Total number of SCM read requests which encountered castout lock contention	197,912	297,612	289,172



RLS SYSPLEX – Multiple Exploiters

Example RLS Configuration – Multiple Exploiters

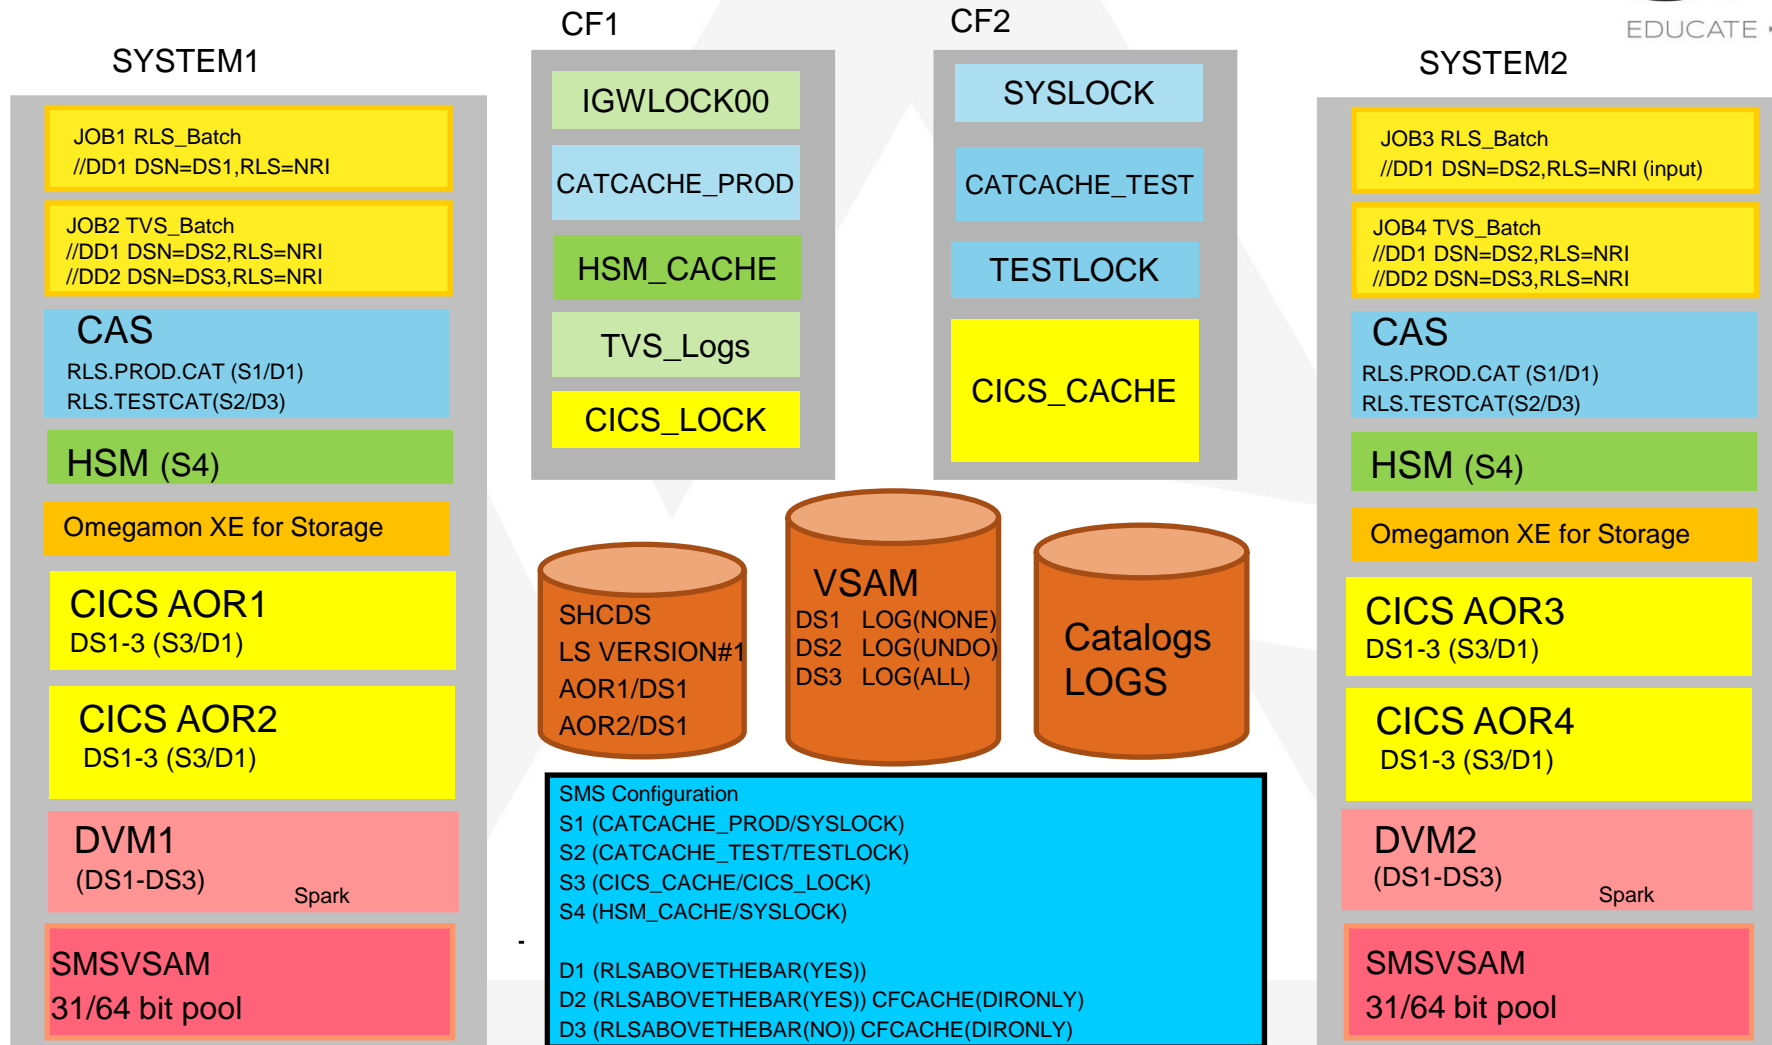



RLS Performance Enhancements

RLS Performance Enhancements

☐ z/OS 1.12

- CA Reclaim - Allows VSAM to recycle unused CA's avoiding the need to reorganize a KSDS to reclaim space and improve performance.

☐ z/OS 2.1

- RLS Catalogs - Allow individual catalog is use RLS access. Eliminates the SYSIGGV2 ENQ, so catalog update requests can run concurrently. Provides 64 bit buffering and caching for catalog data.
- zHyperlink ("syncio") – VSAM read requests will stay synchronous if data is in the dasd cache (OA52876 - open).
- Buffer Manager Improvements: OA52392 and OA55099.

☐ z/OS 2.2

- Index Record Locks - Allows CI splits and reclaims to execute in parallel in different CAs.

☐ z/OS 2.3

- AIX Upgrade Lock Removal - Allows concurrent updates to VSAM spheres with AIXs defined.


RLS Performance Enhancements (Cont.)

- ❑ **OA60377** - POOR VSAM RLS PERFORMANCE DUE TO HOLDING LOCAL LOCKS TOO OFTEN.
 - Client benchmark showed 45% latency improvement
- ❑ **OA61661** - POOR VSAM RLS PERFORMANCE DUE TO HOLDING LOCAL LOCKS TOO OFTEN.




RLS Customer Benchmarks and Performance Data



RLS Catalog Customer Benchmark

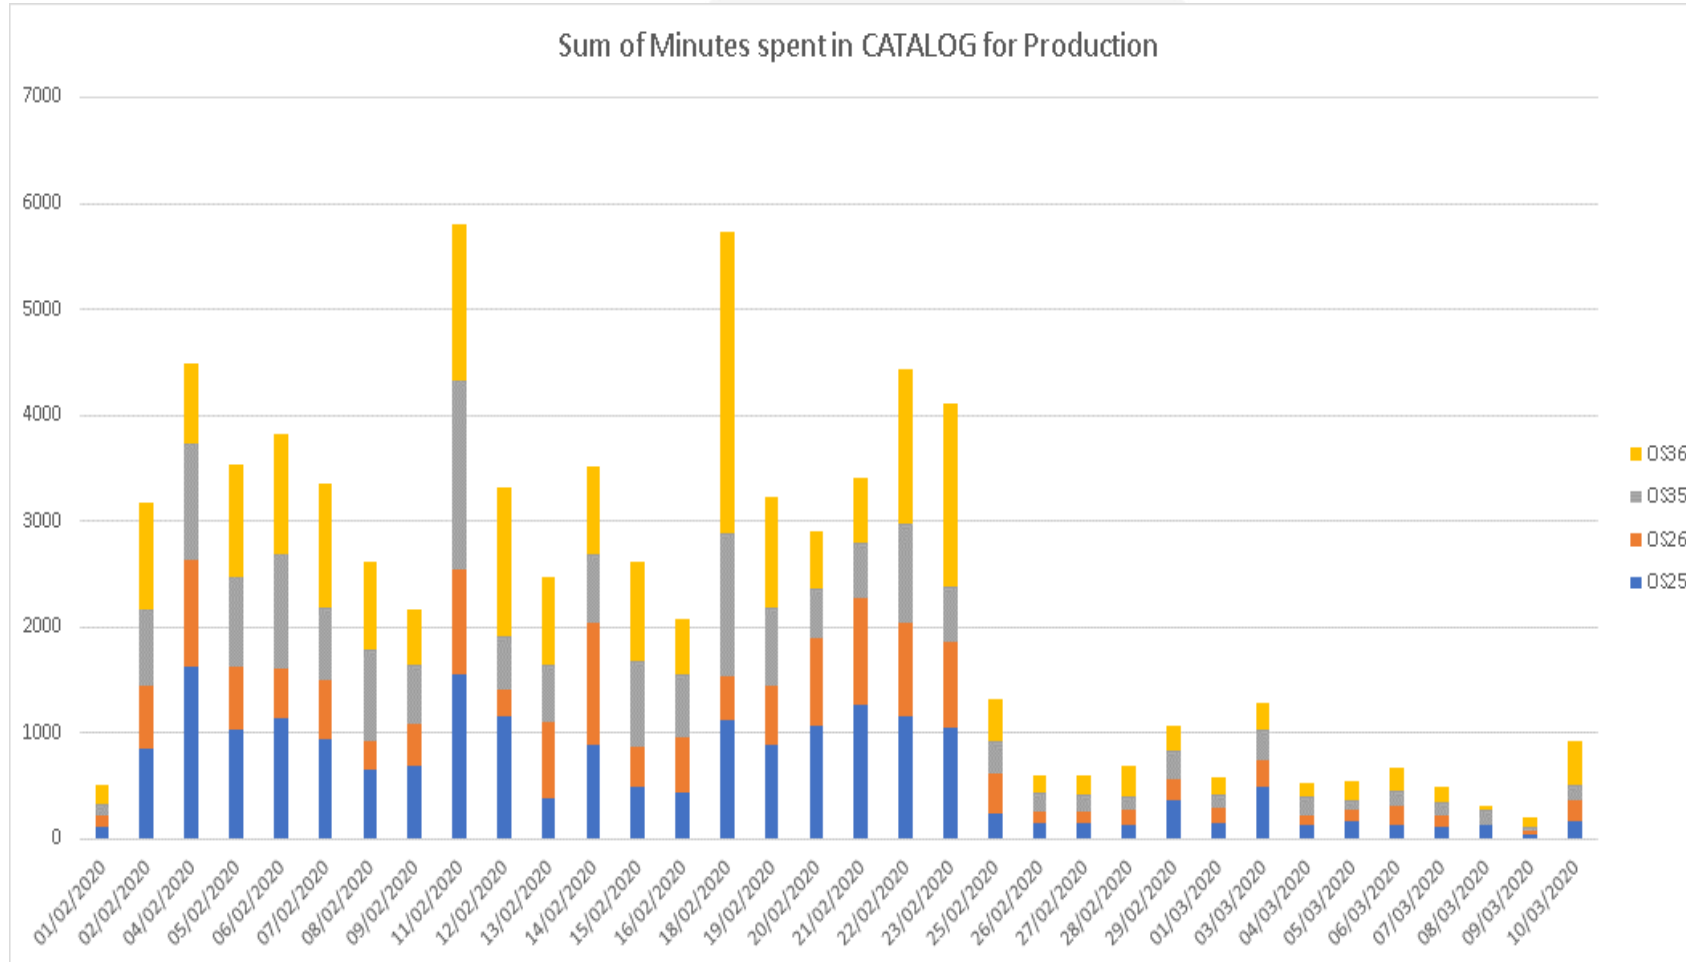

RLS Catalog Customer Benchmark

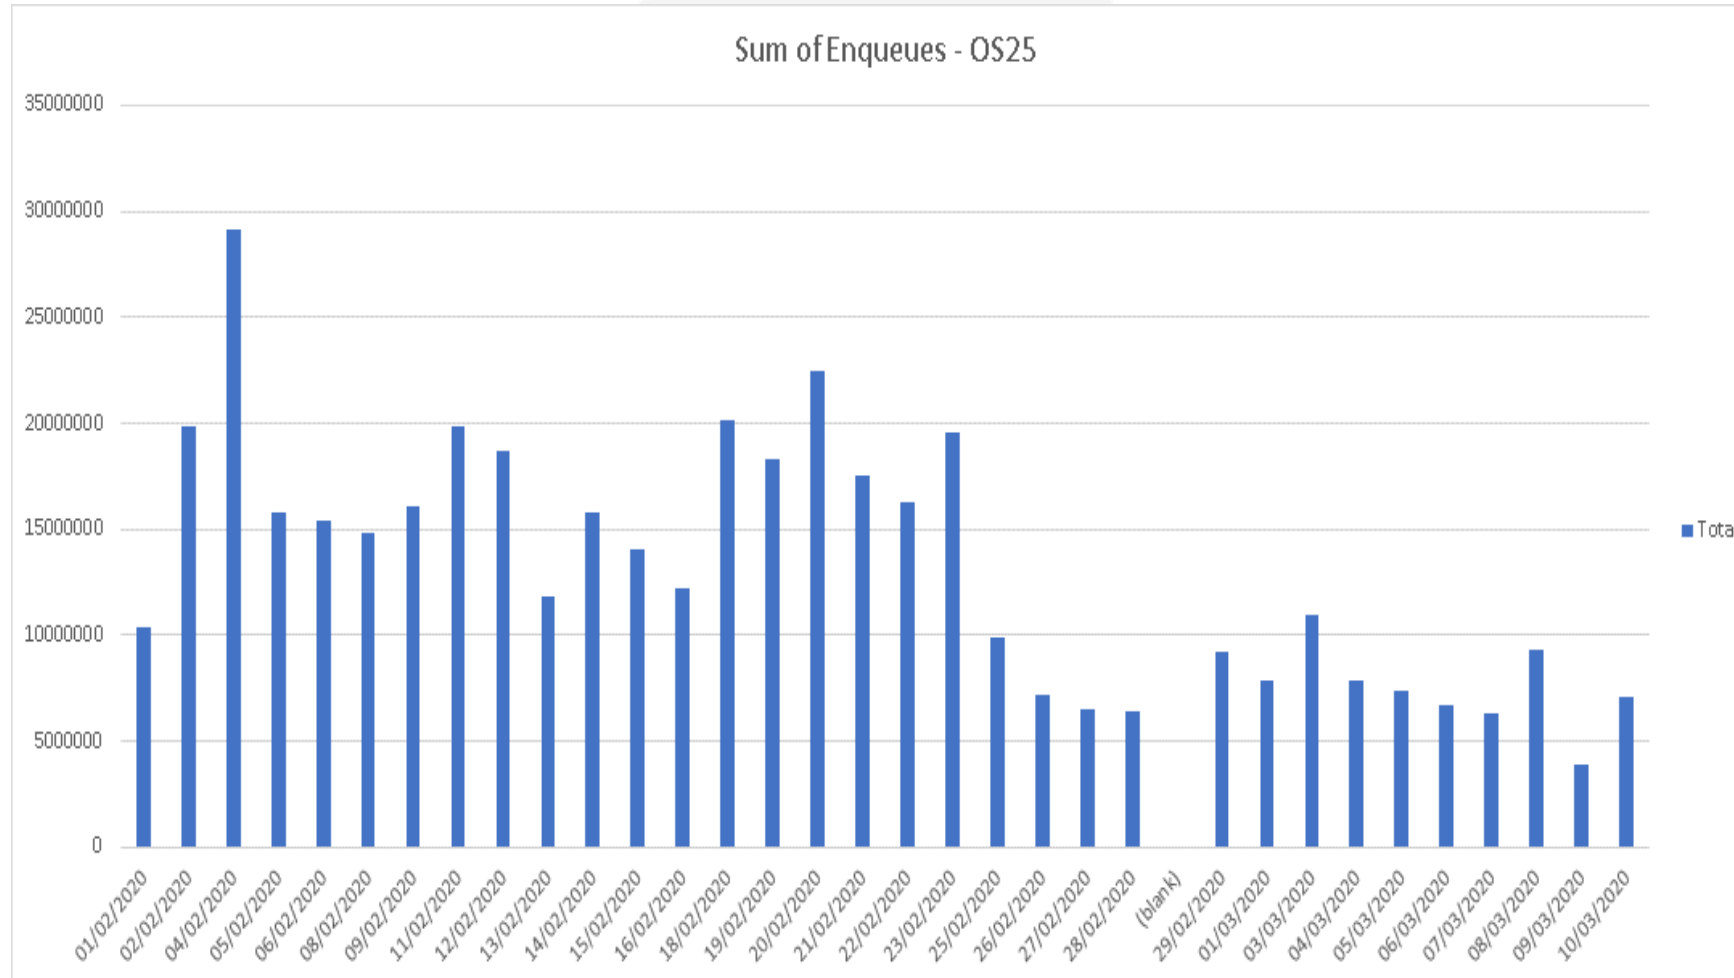

RLS Catalog Customer Benchmark

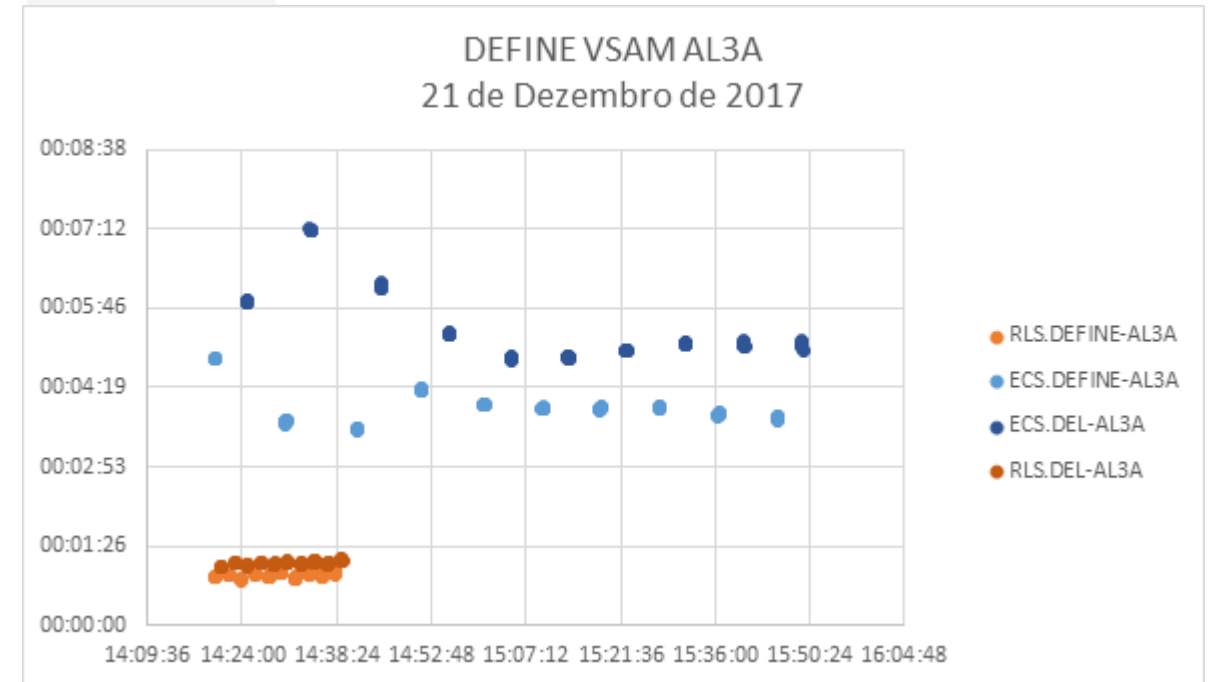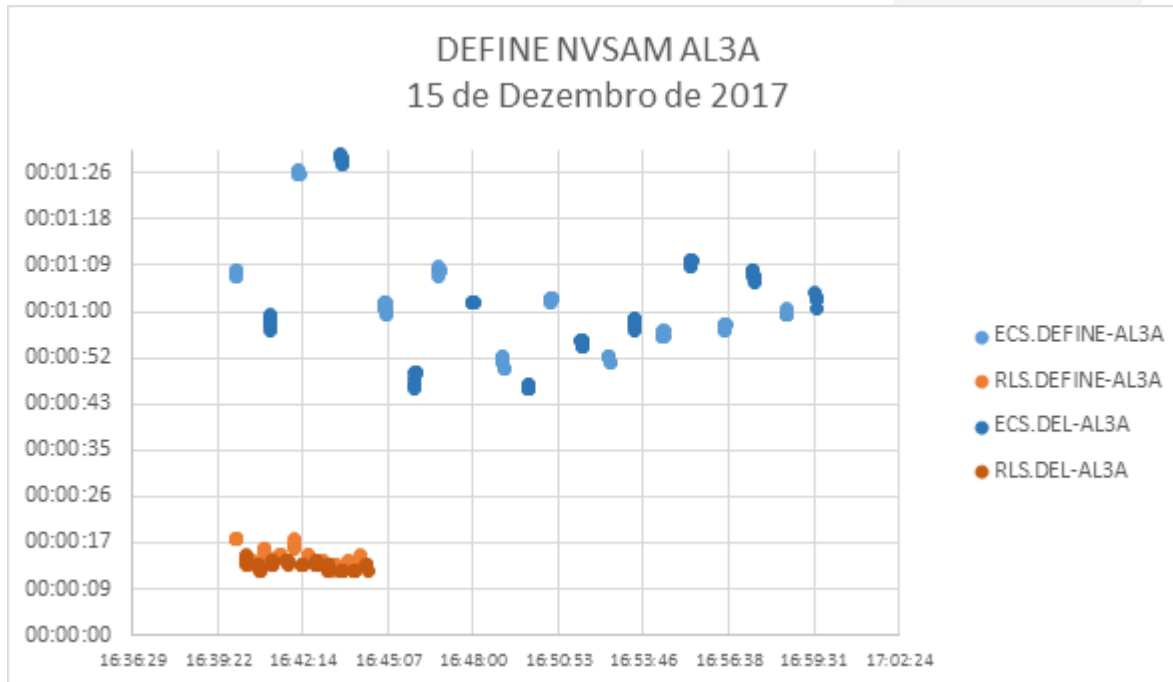

RLS HSM/Catalog Customer Benchmark

SYSPLEX	Metric	NonRLS	RLS	Delta
ALL PLEXES	Elapsed Time HSM Space Mgt	19:48:18	17:22:05	12.3%
ALL PLEXES	Elapse Time HSM SMF202 (Backup/Recall/Migration)	246634342732	97592913560	60.4%
ALL PLEXES	CATSTATX Ave CPU Time	3166	869	72.5%
ALL PLEXES	CATSTATX Ave Elapse Time	12.84	2.52	80.4%



Questions ???